


Lap joint flanges

2500 lb/sq. in.

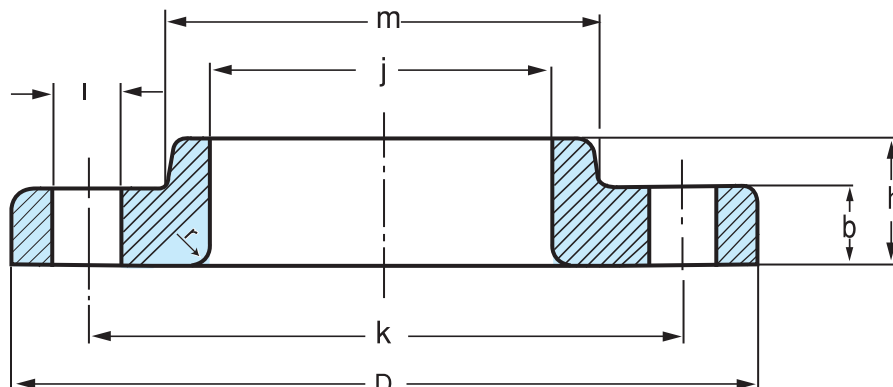

ASME B 16.5

Dimensions are in millimeters.

Ø	D	b	m	j	h	r	k	HOLES	l	Kg.
1/2"	133.4	30.2	42.9	22.9	39.6	3.0	88.9	4	22.3	2.9
3/4"	139.7	31.8	50.8	28.2	42.9	3.0	95.3	4	22.3	3.4
1"	158.8	35.1	57.2	35.1	47.8	3.0	108.8	4	25.4	4.7
1 1/4"	184.2	38.1	73.2	43.7	52.3	4.8	130.0	4	28.4	7.0
1 1/2"	203.2	44.5	79.2	50.0	60.5	6.4	146.1	4	31.8	9.9
2"	235.0	50.8	95.3	62.5	69.9	7.9	171.5	8	28.4	14.7
2 1/2"	266.7	57.2	114.3	75.4	79.2	7.9	196.9	8	31.8	21.3
3"	304.8	66.5	133.4	91.4	91.9	9.7	228.6	8	35.1	32.3
4"	355.6	76.2	165.1	116.8	108.0	11.2	273.1	8	41.1	52.5
5"	419.1	91.9	203.2	144.5	130.0	11.2	323.9	8	47.8	82.6
6"	482.6	108.0	235.0	171.5	152.4	12.7	368.3	8	53.8	127
8"	552.5	127.0	304.8	222.3	177.8	12.7	438.2	12	53.8	186
10"	673.1	165.1	374.7	277.4	228.6	12.7	539.8	12	66.5	352
12"	762.0	184.2	441.5	328.2	254.0	12.7	619.3	12	73.2	501