


Lap joint flanges

600 lb/sq. in.

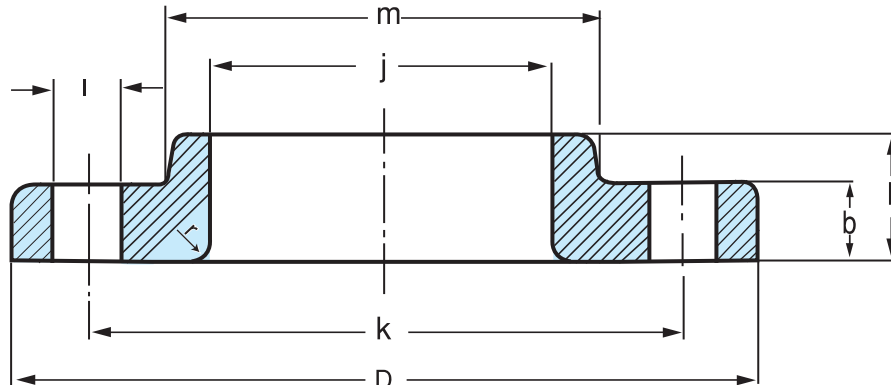

ASME B 16.5

Dimensions are in millimeters.

Ø	D	b	m	j	h	r	k	HOLES	l	Kg.
1/2"	95.2	14.2	38.1	22.9	22.3	3.0	66.5	4	15.9	0.7
3/4"	117.3	15.7	47.6	28.2	25.4	3.0	82.6	4	19.0	1.2
1"	124.0	17.5	54.0	35.1	26.9	3.0	88.9	4	19.0	1.5
1 1/4"	133.4	20.6	63.5	43.7	28.4	4.8	98.6	4	19.0	2.0
1 1/2"	155.4	22.4	69.8	50.0	31.8	6.4	114.3	4	22.2	2.9
2"	165.1	25.4	84.1	62.5	36.6	7.9	127.0	8	19.0	3.5
2 1/2"	190.5	28.4	100.0	75.4	41.1	7.9	149.4	8	22.2	5.2
3"	209.6	31.8	117.5	91.4	46.0	9.7	168.1	8	22.2	6.9
3 1/2"	228.6	35.1	133.1	104.1	49.3	9.7	184.2	8	25.4	8.8
4"	273.1	38.1	152.4	116.8	53.8	11.2	215.9	8	25.4	14.4
5"	330.2	44.5	188.9	144.5	60.5	11.2	266.7	8	28.6	24.3
6"	355.6	47.8	222.2	171.4	66.5	12.7	292.1	12	28.6	28.5
8"	419.1	55.6	273.0	223.3	76.2	12.7	349.3	12	31.7	43.1
10"	508.0	63.5	342.8	277.4	111.3	12.7	431.8	16	34.9	70.5
12"	558.8	66.5	400.0	328.2	117.3	12.7	489.0	20	34.9	86.1
14"	603.3	69.9	431.8	360.2	127.0	12.7	527.1	20	38.1	100
16"	685.8	76.2	495.3	411.2	139.7	12.7	603.3	20	41.3	145
18"	743.0	82.6	546.1	462.3	152.4	12.7	654.1	20	44.4	177
20"	812.8	88.9	609.6	514.4	165.1	12.7	723.9	24	44.4	225
22"	869.9	95.2	666.7	565.1	174.7	12.7	778.0	24	44.4	290
24"	939.8	101.6	717.5	616.0	184.2	12.7	838.2	24	50.8	318