
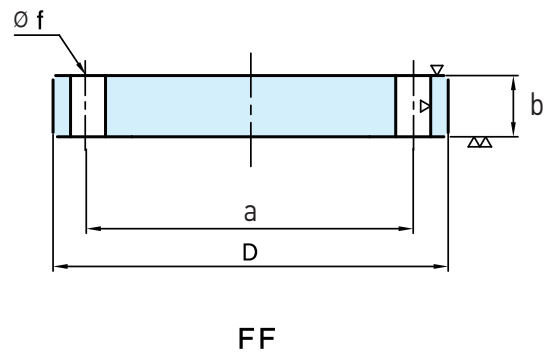


PN.16 Blind Flange Type 05

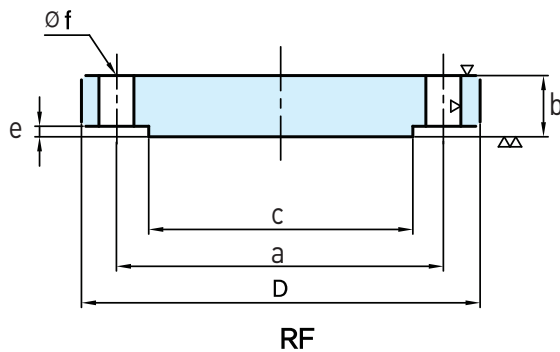

EN 1092-1

Dimensions are in millimeters.

DN	D	b	c	e	f	a	BOLT	HOLES	Kg.
10	90	16	40	2	14	60	M12	4	1,0
15	95	16	45	2	14	65	M12	4	1,0
20	105	18	58	2	14	75	M12	4	1,0
25	115	18	68	2	14	85	M12	4	1,5
32	140	18	78	2	18	100	M16	4	2,0
40	150	18	88	3	18	110	M16	4	2,5
50	165	18	102	3	18	125	M16	4	3,0
65	185	18	122	3	18	145	M16	8	3,5
80	200	20	138	3	18	160	M16	8	4,5
100	220	20	158	3	18	180	M16	8	5,5
125	250	22	188	3	18	210	M16	8	8,0
150	285	22	212	3	22	240	M20	8	10,5
200	340	24	268	3	22	295	M20	12	16,5
250	405	26	320	3	26	355	M24	12	25,0
300	460	28	378	4	26	410	M24	12	35,0
350	520	30	438	4	26	470	M24	16	48,0
400	580	32	490	4	30	525	M27	16	63,5
450	640	40	550	4	30	585	M27	20	96,5
500	715	44	610	4	33	650	M30	20	133,0
600	840	54	725	5	36	770	M33	20	226,5
700	910	58	795	5	36	840	M33	24	285,0
800	1025	62	900	5	39	950	M36	24	388,0
900	1125	64	1000	5	39	1050	M36	28	483,0
1000	1255	68	1115	5	42	1170	M39	28	640,0
1200	1485	*	1330	5	48	1390	M45	32	*
1400	1685	*	1530	5	48	1590	M45	36	*
1600	1930	*	1750	5	56	1820	M52	40	*
1800	2130	*	1950	5	56	2020	M52	44	*
2000	2345	*	2150	5	62	2230	M56	48	*

* To be specified by the client