



PN. 6 Flat Flange Type 01

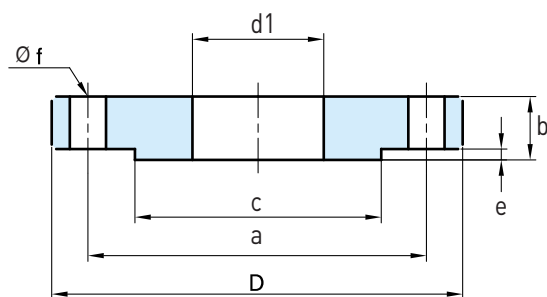

RF

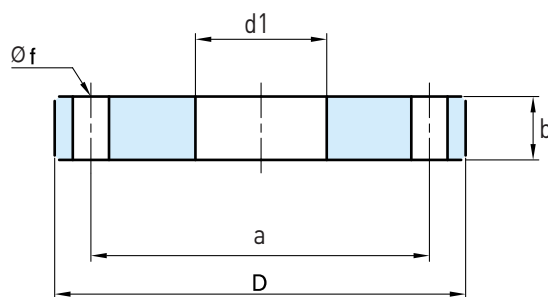

FF

EN 1092-1

Dimensions are in millimeters.

DN	Ø PIPE	d1	D	b	c	e	f	a	BOLT	HOLES	Kg.
10	17,2	18,0	75	12	35	2	11	50	M10	4	0,5
15	21,3	22,0	80	12	40	2	11	55	M10	4	0,5
20	26,9	27,5	90	14	50	2	11	65	M10	4	0,5
25	33,7	34,5	100	14	60	2	11	75	M10	4	0,5
32	42,4	43,5	120	16	70	2	14	90	M12	4	1,0
40	48,3	49,5	130	16	80	3	14	100	M12	4	1,5
50	60,3	61,5	140	16	90	3	14	110	M12	4	1,5
65	76,1	77,5	160	16	110	3	14	130	M12	4	2,0
80	88,9	90,5	190	18	128	3	18	150	M16	4	3,0
100	114,3	116,0	210	18	148	3	18	170	M16	4	3,5
125	139,7	141,5	240	20	178	3	18	200	M16	8	4,5
150	168,3	170,5	265	20	202	3	18	225	M16	8	5,0
200	219,1	221,5	320	22	258	3	18	280	M16	8	7,0
250	273,0	276,5	375	24	312	3	18	335	M16	12	9,0
300	323,9	327,5	440	24	365	4	22	395	M20	12	12,0
350	355,6	359,5	490	26	415	4	22	445	M20	12	17,0
400	406,4	411,0	540	28	465	4	22	495	M20	16	20,0
450	457,2	462,0	595	30	520	4	22	550	M20	16	24,5
500	508,0	513,5	645	30	570	4	22	600	M20	20	26,5
600	609,6	616,5	755	32	670	5	26	705	M24	20	35,0
700	711,2	718,0	860	40	775	5	26	810	M24	24	*
800	812,8	819,0	975	44	880	5	30	920	M27	24	*
900	914,4	920,0	1075	48	980	5	30	1020	M27	24	*
1000	1016,0	1022,0	1175	52	1080	5	30	1120	M27	28	*
1200	1219,2	1224,0	1405	60	1295	5	33	1340	M30	32	*
1400	1422,0	1426,0	1630	72	1510	5	36	1560	M33	36	*
1600	1626,0	1632,0	1830	80	1710	5	36	1760	M33	40	*
1800	1829,0	1836,0	2045	88	1920	5	39	1970	M36	44	*
2000	2032,0	2038,0	2265	96	2125	5	42	2180	M39	48	*

* To be specified by the client