



PN.10 Flat Flange Type 01

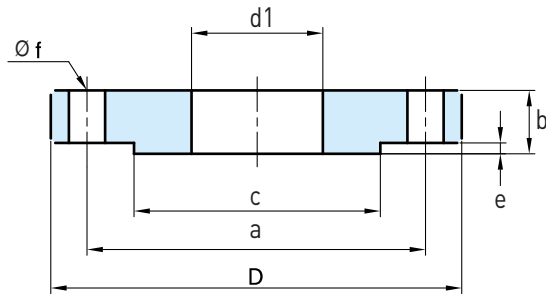

RF

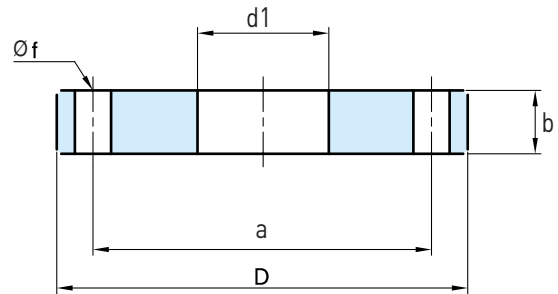

FF

EN 1092-1

Dimensions are in millimeters.

DN	Ø PIPE	d1	D	b	c	e	f	a	BOLT	HOLES	Kg.
10	17,2	18,0	90	14	40	2	14	60	M12	4	0,6
15	21,3	22,0	95	14	45	2	14	65	M12	4	0,6
20	26,9	27,5	105	16	58	2	14	75	M12	4	1,0
25	33,7	34,5	115	16	68	2	14	85	M12	4	1,0
32	42,4	43,5	140	18	78	2	18	100	M16	4	2,0
40	48,3	49,5	150	18	88	3	18	110	M16	4	2,0
50	60,3	61,5	165	20	102	3	18	125	M16	4	2,5
65	76,1	77,5	185	20	122	3	18	145	M16	8	3,0
80	88,9	90,5	200	20	138	3	18	160	M16	8	3,5
100	114,3	116,0	220	22	158	3	18	180	M16	8	4,5
125	139,7	141,5	250	22	188	3	18	210	M16	8	5,5
150	168,3	170,5	285	24	212	3	22	240	M20	8	7,0
200	219,1	221,5	340	24	268	3	22	295	M20	8	9,5
250	273,0	276,5	395	26	320	3	22	350	M20	12	12,0
300	323,9	327,5	445	26	370	4	22	400	M20	12	13,5
350	355,6	359,5	505	30	430	4	22	460	M20	16	20,5
400	406,4	411,0	565	32	482	4	26	515	M24	16	27,5
450	457,2	462,0	615	36	532	4	26	565	M24	20	33,5
500	508,0	513,5	670	38	585	4	26	620	M24	20	40,0
600	609,6	616,5	780	42	685	5	30	725	M27	20	54,5
700	711,2	718,0	895	50	800	5	30	840	M27	24	*
800	812,8	819,0	1015	56	905	5	33	950	M30	24	*
900	914,4	920,0	1115	62	1005	5	33	1050	M30	28	*
1000	1016,0	1022,0	1230	70	1110	5	36	1160	M33	28	*
1200	1219,2	1224,0	1455	83	1330	5	39	1380	M36	32	*
1400	1422,0	1426,0	1675	*	1535	5	42	1590	M39	36	*
1600	1626,0	1632,0	1915	*	1760	5	48	1820	M45	40	*
1800	1829,0	1836,0	2115	*	1960	5	48	2020	M45	44	*
2000	2032,0	2038,0	2325	*	2170	5	48	2230	M45	48	*

* To be specified by the client