



PN.16 Flat Flange Type 01

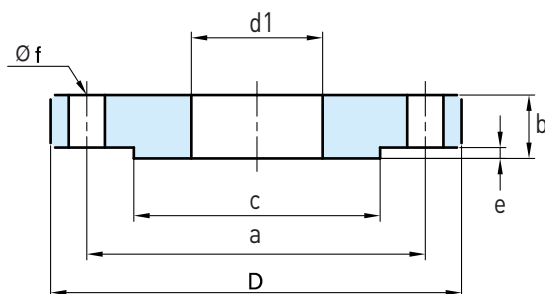

RF

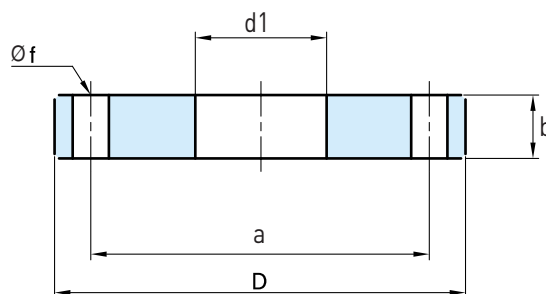

FF

EN 1092-1

Dimensions are in millimeters.

DN	Ø PIPE	d1	D	b	c	e	f	a	BOLT	HOLES	Kg.
10	17,2	18,0	90	14	40	2	14	60	M12	4	0,6
15	21,3	22,0	95	14	45	2	14	65	M12	4	0,6
20	26,9	27,5	105	16	58	2	14	75	M12	4	1,0
25	33,7	34,5	115	16	68	2	14	85	M12	4	1,0
32	42,4	43,5	140	18	78	2	18	100	M16	4	2,0
40	48,3	49,5	150	18	88	3	18	110	M16	4	2,0
50	60,3	61,5	165	20	102	3	18	125	M16	4	2,5
65	76,1	77,5	185	20	122	3	18	145	M16	8	3,0
80	88,9	90,5	200	20	138	3	18	160	M16	8	3,5
100	114,3	116,0	220	22	158	3	18	180	M16	8	4,5
125	139,7	141,5	250	22	188	3	18	210	M16	8	5,5
150	168,3	170,5	285	24	212	3	22	240	M20	8	7,0
200	219,1	221,5	340	26	268	3	22	295	M20	12	9,5
250	273,0	276,5	405	29	320	3	26	355	M24	12	14,0
300	323,9	327,5	460	32	378	4	26	410	M24	12	19,0
350	355,6	359,5	520	35	438	4	26	470	M24	16	28,0
400	406,4	411,0	580	38	490	4	30	525	M27	16	36,0
450	457,2	462,0	640	42	550	4	30	585	M27	20	46,0
500	508,0	513,5	715	46	610	4	33	650	M30	20	64,0
600	609,6	616,5	840	55	725	5	36	770	M33	20	102,0
700	711,2	718,0	910	63	795	5	36	840	M33	24	*
800	812,8	819,0	1025	74	900	5	39	950	M36	24	*
900	914,4	920,0	1125	82	1000	5	39	1050	M36	28	*
1000	1016,0	1022,0	1255	90	1115	5	42	1170	M39	28	*
1200	1219,2	1224,0	1485	*	1330	5	48	1390	M45	32	*
1400	1422,0	1426,0	1685	*	1530	5	48	1590	M45	36	*
1600	1626,0	1632,0	1930	*	1750	5	56	1820	M52	40	*
1800	1829,0	1836,0	2130	*	1950	5	56	2020	M52	44	*
2000	2032,0	2038,0	2345	*	2150	5	62	2230	M56	48	*

* To be specified by the client