
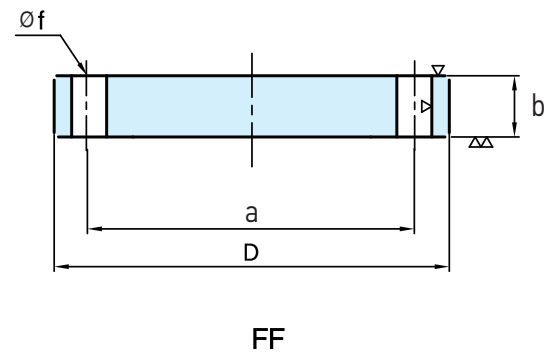


PN. 2.5 Blind Flange Type 05

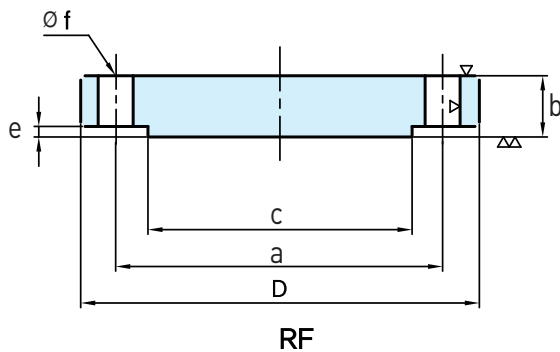

EN 1092-1

Dimensions are in millimeters.

DN	D	b	c	e	f	a	BOLT	HOLE	Kg.
10	75	12	35	2	11	50	M10	4	0,5
15	80	12	40	2	11	55	M10	4	0,5
20	90	14	50	2	11	65	M10	4	0,5
25	100	14	60	2	11	75	M10	4	0,5
32	120	14	70	2	14	90	M12	4	1,0
40	130	14	80	3	14	100	M12	4	1,5
50	140	14	90	3	14	110	M12	4	1,5
65	160	14	110	3	14	130	M12	4	2,0
80	190	16	128	3	18	150	M16	4	3,0
100	210	16	148	3	18	170	M16	4	3,5
125	240	18	178	3	18	200	M16	8	4,5
150	265	18	202	3	18	225	M16	8	5,0
200	320	20	258	3	18	280	M16	8	7,0
250	375	22	312	3	18	335	M16	12	9,0
300	440	22	365	4	22	395	M20	12	12,0
350	490	22	415	4	22	445	M20	12	17,0
400	540	22	465	4	22	495	M20	16	20,0
450	595	24	520	4	22	550	M20	16	24,5
500	645	24	570	4	22	600	M20	20	26,5
600	755	30	670	5	26	705	M24	20	35,0
700	860	40	775	5	26	810	M24	24	*
800	975	44	880	5	30	920	M27	24	*
900	1075	48	980	5	30	1020	M27	24	*
1000	1175	52	1080	5	30	1120	M27	28	*
1200	1375	50	1280	5	30	1320	M27	32	*
1400	1575	*	1480	5	30	1520	M27	36	*
1600	1790	*	1690	5	30	1730	M27	40	*
1800	1990	*	1890	5	30	1930	M27	44	*
2000	2190	*	2090	5	30	2130	M27	48	*

* To be specified by the client