



PN. 25 Flat Flange Type 01

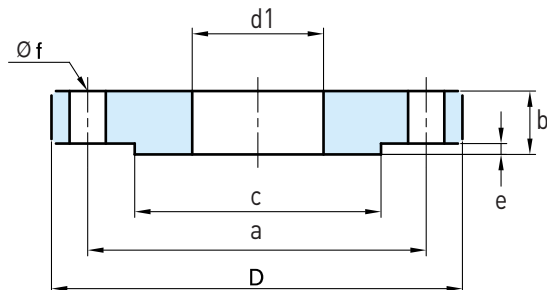

RF

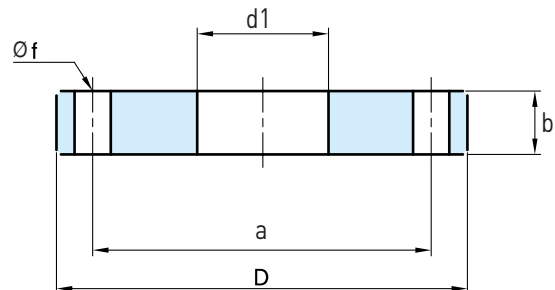

FF

EN 1092-1

Dimensions are in millimeters.

DN	Ø PIPE	d1	D	b	c	e	f	a	BOLT	HOLES	Kg.
10	17,2	18,0	90	14	40	2	14	60	M12	4	0,6
15	21,3	22,0	95	14	45	2	14	65	M12	4	0,5
20	26,9	27,5	105	16	58	2	14	75	M12	4	1,0
25	33,7	34,5	115	16	68	2	14	85	M12	4	1,0
32	42,4	43,5	140	18	78	2	18	100	M16	4	2,0
40	48,3	49,5	150	18	88	3	18	110	M16	4	2,0
50	60,3	61,5	165	20	102	3	18	125	M16	4	2,5
65	76,1	77,5	185	22	122	3	18	145	M16	8	3,5
80	88,9	90,5	200	24	138	3	18	160	M16	8	4,5
100	114,3	116,0	235	26	162	3	22	190	M20	8	6,0
125	139,7	141,5	270	28	188	3	26	220	M24	8	8,0
150	168,3	170,5	300	30	218	3	26	250	M24	8	10,5
200	219,1	221,5	360	32	278	3	26	310	M24	12	14,5
250	273,0	276,5	425	35	335	3	30	370	M27	12	20,0
300	323,9	327,5	485	38	395	4	30	430	M27	16	26,5
350	355,6	359,5	555	42	450	4	33	490	M30	16	42,0
400	406,4	411,0	620	48	505	4	36	550	M33	16	58,0
450	457,2	462,0	670	54	555	4	36	600	M33	20	70,0
500	508,0	513,5	730	58	615	4	36	660	M33	20	87,0
600	609,6	616,5	845	68	720	5	39	770	M36	20	127,5
700	711,2	718,0	960	85	820	5	42	875	M39	24	*
800	812,8	819,0	1085	95	930	5	48	990	M45	24	*
900	914,4	920,0	1185	*	1030	5	48	1090	M45	28	*
1000	1016,0	1022,0	1320	*	1140	5	56	1210	M52	28	*
1200	1219,2	1224,0	1530	*	1350	5	56	1420	M52	32	*
1400	1422,0	1426,0	1755	*	1560	5	62	1640	M56	36	*
1600	1626,0	1632,0	1975	*	1780	5	62	1860	M56	40	*
1800	1829,0	1836,0	2195	*	1985	5	70	2070	M64	44	*
2000	2032,0	2038,0	2425	*	2210	5	70	2300	M64	48	*

* To be specified by the client